




VALV. CONTROLLO ROTAZIONE, DI BILANC. D.E., SERIE "TR"
CON VALVOLE ANTIURTO E REG. DI FLUSSO 3 A VIE COMP.

ROTATION CONTROL VALVE, DUAL PILOT ASSISTED OVERCENTRE VALVE, "TR" SERIES
WITH DUAL CROSS LINE RELIEF VALVES AND 3 WAY PRESSURE COMPENSATED FLOW REGULATOR

Tipo/Type: VCRT/BDE/RF3C/AD/CC 38/SF

9

20.00

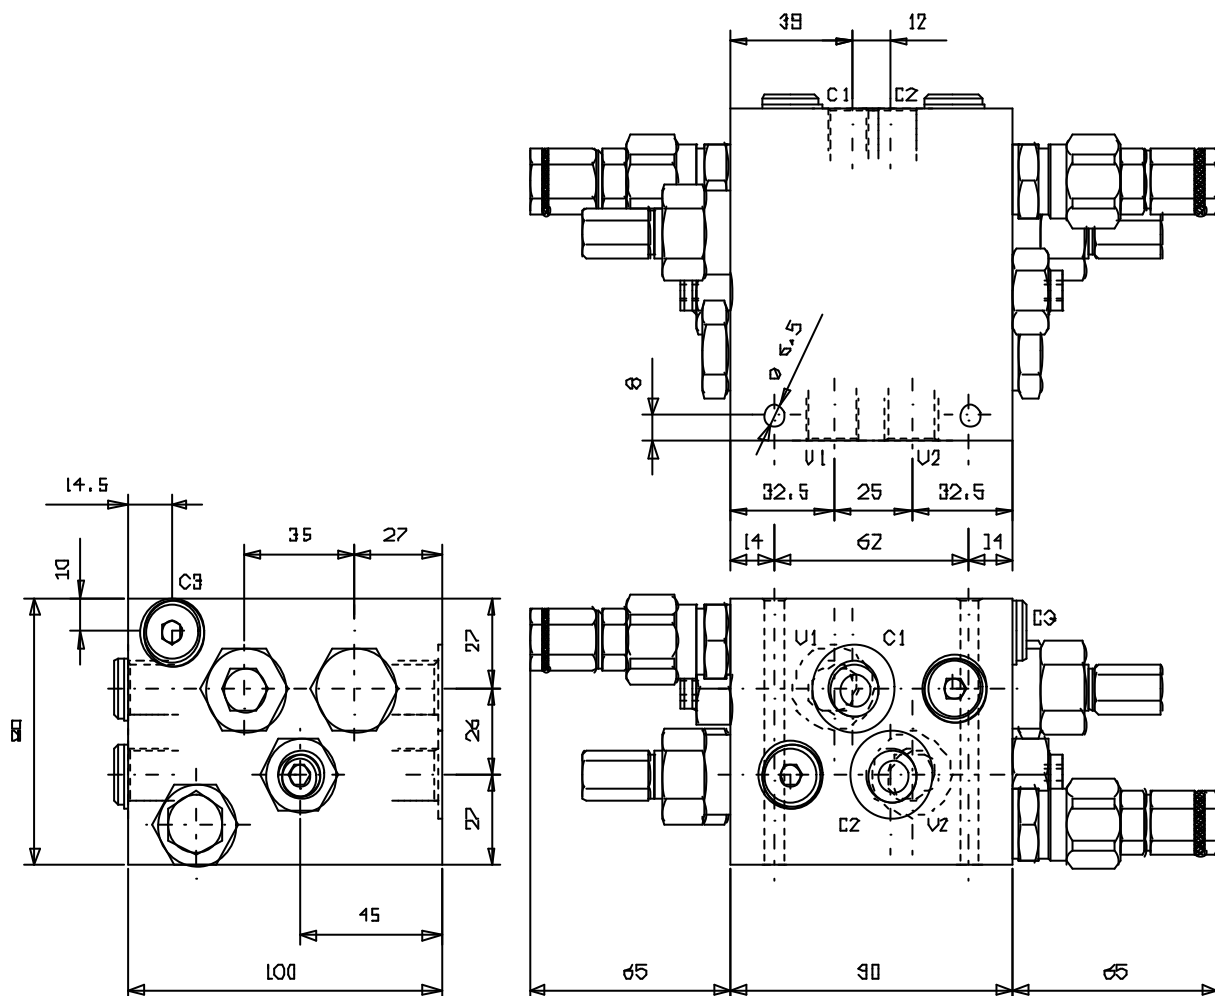

ATTACCHI / PORTS	
U1 - U2	G 3/8
C1 - C2	
C3	G 1/4

Rapp. Pilot.
4.2:1
Altri a richiesta <i>Other on request</i>

Press. max. (Bar)
270

Portata max. (l/min)
60

